

YOU GOT TO GRANT IT TO GRANSA



uPVC COLUMN AND
CASING PIPES

COMPANY PROFILE



YOU GOT TO GRANT IT TO GRANSA

First things first. Gransa is not your run-of-the-mill pump. It is the best there is. Period. In fact it is much more than just pumps. It is a movement. A revolution that can bring about change in the way we look at pumping technology. Gransa incorporates inspired design with new generation technology to ensure perfection at every level. Aesthetically pleasing with its sleek hi-tech looks, every Gransa pump is a marvel of workmanship and design and technologically superior. Functionally, Gransa is in a class all its own. The performance parameters are legendary and would leave you awe struck. It is not for nothing that it is said: you got to grant it to Gransa!

The Gransa quality edge comes from our collective attitude that will not compromise, will not accept second best, will not take no for an answer and will not rest until the perfect solution is found. Every single product bears the imprint of this commitment. Right from sourcing raw material to the finished product every step is



monitored both online and offline till it meets our exacting standards. We know that there is a lot riding on the quality of the raw material used in the manufacture of the pump. That is why we invest more time and money in sourcing the finest raw material available to give you a pump that is perfect in all respects. Another area where our pumps score is in energy efficiency. In these days of depleting energy resources, we believe that it is imperative that power saving should be central to your buying decision.

The fact that the manufacturing facilities are quite extensive and state of the art makes a big difference. The infrastructure is one of the best in the world - CI foundry, fully mechanized and Steel automated Foundry, world class R&D facilities with flow dynamic software, ISO 9001 & 14001 Certified production environment, highly skilled and qualified hands and more. All contributing to a production capacity of over 1 million pumps per annum.


The range is extensive. Applications include irrigation, domestic, civil construction, de-watering, Fire fighting, HVAC, Industrial etc. Our 4" to 8" borehole submersible pumps meet NEMA standards.

Gransa, in keeping with its reputation as a global brand has a wide network across strategic locations worldwide with an extensive dealer presence and service support centers.

uPVC COLUMN AND CASING PIPES

FEATURES

- Rigid construction & longer life span
- Can be used for potable water supply.
- Specially designed square threads are capable of withstanding heavy load and are corrosion free.
- PBTS locking system: (Polymer Bond Thread Sink) To avoid the loosening of coupler during the removal of pipes, a special polymer is injected into the threads via the coupler. The polymer forms a permanent bond between the coupler and pipe, thus nullifying any possibility of coupler loosening.
- Special rubber seal is provided at the end of threads to ensure 100% leak proof joints even at high pressure.
- A special rubber (EPDM - Highstrand) ring is provided in the coupling between the two pipes to absorb the vibration caused due to high pump pressure.
- Internal surface of these pipes are very smooth, resulting in very low head loss due to friction and increases water discharge upto 30%, compared with traditional G.I. pipes, thereby saving power.
- uPVC column pipes are resistant to chemical reactions when used in acidic or alkaline waters assuring long life.
- Can handle water with maximum temperature upto 45°C.
- These pipes come in 3m Standard length and are of light weight ensuring easy handling, storage and installation.

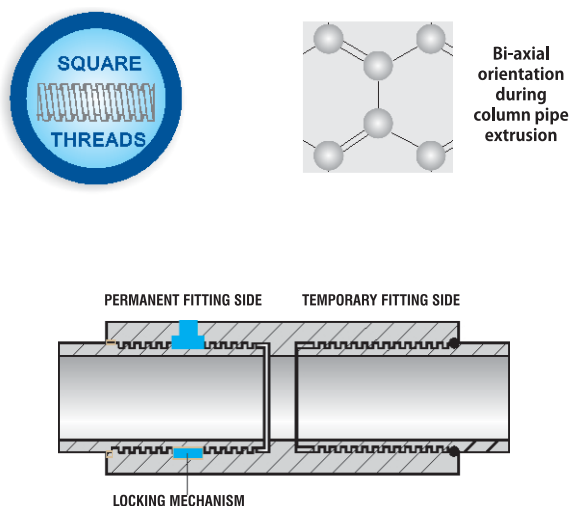


Physical and Mechanical Properties of uPVC - Table 2

Property	Unit	Standard
Specific Gravity	1.40 to 1.46 g/cm ³	As per IS : 12818 : 2010
Tensile Strength	Min 45 MPa	As per IS : 12818 : 2010
Resistance to external blows @ 0°C	0% True Impact Rate (TIR)	As per IS : 12818 : 2010
Vicat Softening Temperature	Min 80°C	As per IS : 12818 : 2010

DIMENSION DETAILS

Dimension Details (Table 3)							
Nominal Pipe Size	Coupling Type	Variant	Wall thickness at ends (mm)		Wall thickness at center (mm)		No. of pipes per bundle (Nos)
			Min.	Max.	Min.	Max.	
OD Min 32.8 mm, Max 33.1mm							
1 inch (OD: 33mm)	Bell Mouth	Espy	3.4	3.6	1.7	2.0	25
		Elite	3.6	3.9	1.7	2.0	25
		Medium	4.0	4.3	2.0	2.3	25
		Standard	5.2	5.5	3.1	3.4	25
	Coupler	Espy	3.4	3.6	1.7	2.0	25
		Elite	3.6	3.9	1.7	2.0	25
		Medium	4.0	4.3	2.0	2.3	25
		Standard	5.2	5.5	3.1	3.4	25
OD Min 41.8, Max 42.1mm							
1½ inch (OD: 42mm)	Bell Mouth	Espy	3.7	4	2	2.3	25
		Elite	4.5	4.8	2.4	2.7	25
		Medium	5.0	5.3	2.9	3.2	25
		Standard	5.5	5.8	3.4	3.7	25
	Coupler	Espy	3.7	4	2	2.3	25
		Elite	4.5	4.8	2.4	2.7	25
		Medium	5.0	5.3	2.9	3.2	20
		Standard	5.5	5.8	3.4	3.7	20
		Heavy	7.6	7.9	4.5	4.8	15
		Super Heavy	7.8	8.1	5.3	5.6	15
OD Min 47.8, Max 48.1mm							
1½ inch (OD: 48mm)	Bell Mouth	Espy	3.8	4.1	2.3	2.6	20
		Elite	4.9	5.2	2.8	3.1	20
		Medium	5.4	5.7	3.3	3.6	20
		Standard	6.1	6.4	4.0	4.3	20
	Coupler	Espy	3.8	4.1	2.3	2.6	20
		Elite	4.9	5.2	2.8	3.1	20
		Medium	5.4	5.7	3.3	3.6	20
		Standard	6.1	6.4	4.0	4.3	20
		Heavy	8.3	8.6	5.2	5.5	15
		Super Heavy	8.5	8.8	6.0	6.3	10
OD Min 59.8, Max 60.1 mm							
2 inch (OD: 60mm)	Bell Mouth	Elite	4.0	4.3	1.8	2.1	15
		Medium	5.1	5.4	2.6	2.9	15
		Standard	6.4	6.7	3.9	4.2	10
	Coupler	Espy	3.8	4.1	1.6	1.9	15
		Elite	4.0	4.3	1.8	2.1	15
		Medium	5.1	5.4	2.6	2.9	15
		Standard	6.4	6.7	3.5	3.8	15
		Heavy	7.8	8.1	4.7	5.0	10
Super Heavy	9.0	9.3	6.5	6.8	10		

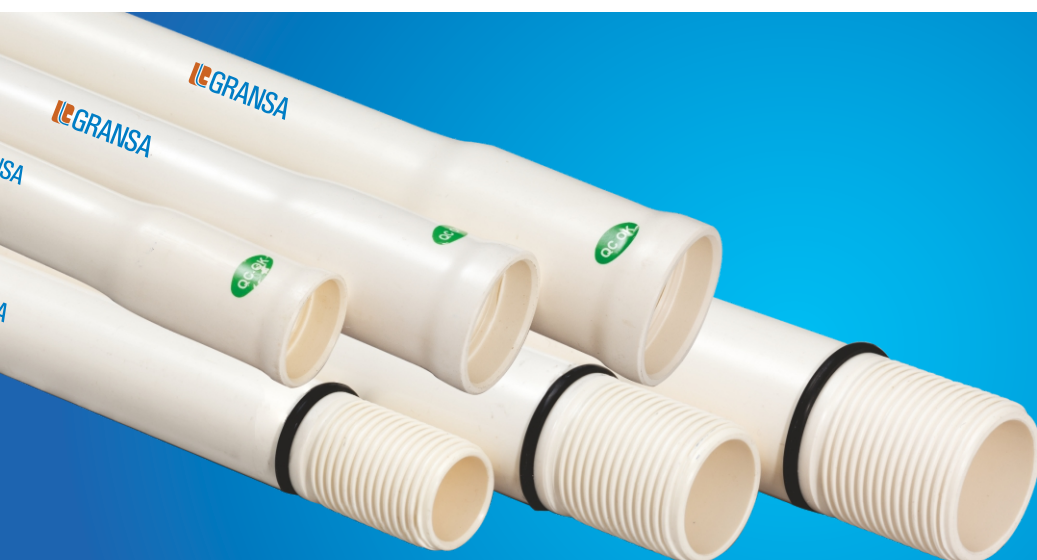

DIMENSION DETAILS

Nominal Pipe Size	Coupling Type	Variant	Wall thickness at ends (mm)		Wall thickness at center (mm)		No. of pipes per bundle (Nos)
			Min.	Max.	Min.	Max.	
	OD Min 74.7, Max 75.2 mm						
2½ inch (OD: 75mm)	Coupler	Medium	5.1	5.4	2.6	2.9	10
		Standard	6.5	6.8	4.0	4.3	10
		Heavy	9.0	9.3	6.3	6.6	7
		Super Heavy	10.8	11.1	8.3	8.6	5
	OD Min 87.7, Max 88.2 mm						
3 inch (OD: 88mm)	Coupler	Medium	5.7	6.0	3.2	3.5	8
		Standard	7.5	7.8	4.6	4.9	5
		Heavy	9.8	10.1	6.0	6.3	5
		Super Heavy	12.4	12.7	9.7	10.0	5
	OD Min 112.7, Max 113.2 mm						
4 inch (OD: 113mm)	Coupler	Medium	6.3	6.6	3.8	4.1	5
		Standard	8.2	8.5	5.7	6.0	5
		Heavy	11.9	12.3	7.0	7.3	3
		Super Heavy	15.1	15.4	12.6	12.9	3
	OD Min 139.7, Max 140.2 mm						
5 inch (OD: 140mm)	Coupler	Standard	10.3	10.6	7.6	7.9	3
		Heavy	15.3	15.6	11.9	12.2	2
		Super Heavy	19.0	19.3	15.6	15.9	2
	OD Min 167.7, Max 168.2 mm						
6 inch (OD: 168mm)	Coupler	Standard	11.8	12.2	8.8	9.2	2
		Heavy	15.0	15.4	10.8	11.2	2
		Super Heavy	19.8	20.2	15.8	16.2	1
	OD Min 219.7, Max 220.2 mm						
8 inch	Column	Heavy	13.0	14.5	-	-	1
Effective length of pipe (3,000 mm ± 10 mm)							

LOAD BEARING DETAILS

Load bearing details of CRI uPVC column pipes - Table 4

Nominal Pipe Size	Coupling type	Variant	Recom- mended depth (m)	Approx. pipe weight for the recommended depth (kg) (A)	Approx. weight of the water in the column (kg) (B)	Approx. weight of the pump set (kg) (C)	Approx. weight of the cable (kg) (D)	Total Weight (A+B+C+D) (kg)	Ultimate breaking load (kg)	Maximum load capacity for pulling with chain pulley (kg)
	OD Min 32.8, Max 33.1 mm									
1 inch (OD: 33mm)	Bell Mouth	Espy	125	40	86	50	50	227	682	455
		Elite	150	51	103	55	70	281	844	563
		Medium	210	82	139	60	90	372	1,117	745
		Standard	300	167	169	65	150	553	1,660	1,107
	Coupler	Espy	125	45	86	50	50	231	700	488
		Elite	150	59	103	55	70	287	900	607
		Medium	210	92	139	60	90	381	1,200	803
		Standard	300	181	169	65	150	565	1,700	1,191
	OD Min 41.8, Max 42.1 mm									
1¼ inch (OD: 42mm)	Bell Mouth	Espy	125	56	142	70	50	321	962	641
		Elite	150	78	163	75	70	388	1,165	776
		Medium	210	125	217	80	90	515	1,544	1,029
		Standard	260	197	254	85	150	689	2,066	1,378
	Coupler	Espy	125	62	142	70	50	324	1,000	685
		Elite	150	89	163	75	70	397	1,200	838
		Medium	210	140	217	80	90	527	1,600	1,112
		Standard	260	204	254	85	150	694	2,100	1,462
		Heavy	350	336	299	90	220	945	2,900	1,990
		Super Heavy	400	433	310	130	250	1,123	3,400	2,364
	OD Min 47.8, Max 48.1 mm									
1½ inch (OD: 48mm)	Bell Mouth	Espy	125	72	185	100	50	411	1,232	821
		Elite	150	103	213	110	70	498	1,495	997
		Medium	210	163	284	120	90	660	1,987	1,321
		Standard	260	235	328	130	150	847	2,540	1,694
	Coupler	Espy	125	79	185	100	50	414	1,300	876
		Elite	150	113	213	110	70	506	1,500	1,069
		Medium	210	177	284	120	90	671	2,000	1,416
		Standard	260	265	328	130	150	873	2,700	1,840
		Heavy	350	432	388	140	220	1,180	3,600	2,485
		Super Heavy	400	537	407	160	250	1,354	2,500	1,722
	OD Min 59.8, Max 60.1 mm									
2 inch (OD: 60mm)	Bell Mouth	Espy	70	40	177	150	70	440	1,321	880
		Elite	90	57	225	150	70	506	1,518	1,012
		Medium	130	110	306	160	90	671	2,012	1,342
		Standard	200	232	428	170	150	984	2,951	1,968
	Coupler	Espy	70	47	177	150	70	444	1,400	940
		Elite	90	70	225	150	70	515	1,600	1,091
		Medium	130	128	306	160	90	685	2,100	1,447
		Standard	200	259	428	170	150	1,007	3,100	2,124
		Heavy	270	449	517	180	220	1,366	4,100	2,877
		Super Heavy	350	708	1,056	200	250	2,214	6,700	4,663



LOAD BEARING DETAILS

Nominal Pipe Size	Pipe type	Variant	Recom- mended depth (m)	Approx. pipe weight for the recommended depth (kg) (A)	Approx. weight of the water in the column (kg) (B)	Approx. weight of the pump set (kg) (C)	Approx. weight of the cable (kg) (D)	Total Weight (A+B+C+D) (kg)	Ultimate breaking load (kg)	Maximum load capacity for pulling with chain pulley (kg)
	OD Min 74.7, Max 75.2 mm									
2½ inch (OD: 75mm)	Coupler	Medium	100	125	382	270	90	868	2,700	1,835
		Standard	160	269	564	290	150	1,273	3,900	2,686
		Heavy	260	629	795	310	220	1,954	5,900	4,116
		Super Heavy	350	1,083	937	350	250	2,620	7,900	5,517
	OD Min 87.7, Max 88.2 mm									
3 inch (OD: 88mm)	Coupler	Medium	110	189	575	375	90	1,229	3,700	2,596
		Standard	170	401	812	400	150	1,763	5,300	3,717
		Heavy	260	829	1,100	450	220	2,599	7,800	5,474
		Super Heavy	350	1,443	1,293	450	280	3,466	10,400	7,296
	OD Min 112.7, Max 113.2 mm									
4 inch (OD: 113mm)	Coupler	Medium	100	257	872	500	70	1,699	5,200	3,592
		Standard	150	517	1,215	500	180	2,412	7,300	5,090
		Heavy	260	1,359	1,811	550	280	4,000	12,000	8,426
		Super Heavy	350	2,403	2,118	550	280	5,351	16,100	11,265
	OD Min 139.7, Max 140.2 mm									
5 inch (OD: 140mm)	Coupler	Standard	160	888	1,956	600	220	3,664	11,000	7,726
		Heavy	260	2,154	2,756	650	280	5,840	17,500	12,301
		Super Heavy	350	3,792	3,252	650	300	7,994	24,000	16,825
	OD Min 167.7, Max 168.2 mm									
6 inch (OD: 168mm)	Coupler	Standard	170	1,325	3,019	750	350	5,444	16,400	11,483
		Heavy	260	2,397	4,374	750	450	7,971	24,000	16,793
		Super Heavy	350	4,002	5,112	800	500	10,414	31,500	22,000
8 inch	Column	Heavy	110	1715	3500	845	550	6610	22500	15000
Effective length of the pipe (3,000 mm ± 10 mm)										

APPROXIMATE FRICTIONAL HEAD LOSS IN GRANSA STANDARD TYPE COLUMN PIPES

FLOW		NOMINAL DIAMETER OF PIPE (INCHES/MM) (Table - 5)								
m ³ /h	l/min.	1" 25	1¼" 32	1½" 40	2" 50	2½" 65	3" 80	4" 100	5" 125	6" 150
1	16.67	1.758	0.570	0.199	0.056	0.018	0.009			
1.5	25.00	3.575	1.158	0.404	0.121	0.037	0.018	0.005	0.002	0.001
2	33.33	5.914	1.917	0.668	0.200	0.061	0.029	0.009	0.003	0.001
2.5	41.67	8.739	2.832	0.987	0.296	0.090	0.043	0.012	0.004	0.002
3	50.00	12.023	3.897	1.358	0.407	0.123	0.059	0.017	0.005	0.002
3.5	58.33	15.747	5.103	1.779	0.533	0.162	0.077	0.022	0.007	0.003
4	66.67	19.892	6.447	2.247	0.674	0.204	0.098	0.028	0.009	0.004
4.5	75.00	24.446	7.922	2.761	0.828	0.251	0.120	0.034	0.011	0.004
5	83.33	29.396	9.526	3.320	0.996	0.302	0.144	0.041	0.013	0.005
6	100.00	40.443	13.107	4.568	1.370	0.415	0.198	0.056	0.017	0.007
7	116.67	52.967	17.165	5.983	1.794	0.544	0.260	0.074	0.023	0.01
8	133.33		21.683	7.557	2.267	0.687	0.328	0.093	0.029	0.012
9	150.00		26.647	9.287	2.785	0.844	0.403	0.115	0.036	0.015
10	166.67		29.534	11.168	3.349	1.015	0.485	0.138	0.043	0.018
12	200.00		36.849	12.699	4.608	1.397	0.668	0.190	0.059	0.025
14	233.33		48.657	16.761	6.035	1.830	0.874	0.248	0.078	0.032
16	266.67			21.321	6.312	2.310	1.104	0.314	0.099	0.041
18	300.00			26.368	7.803	2.840	1.357	0.386	0.122	0.051
20	333.33			31.891	9.435	3.080	1.502	0.464	0.148	0.061
22	366.67			37.883	11.204	3.351	1.696	0.548	0.175	0.072
24	400.00			44.334	13.108	3.920	1.859	0.638	0.205	0.085
26	433.33				15.146	4.528	2.147	0.734	0.237	0.098
28	466.67				17.316	5.176	2.453	0.835	0.27	0.112
30	500.00				19.615	5.862	2.778	0.979	0.306	0.126
35	583.33				25.921	7.743	3.669	1.028	0.404	0.167
40	666.67				33.010	9.856	4.669	1.307	0.515	0.212
45	750.00				40.863	12.196	5.776	1.617	0.638	0.263
50	833.33				49.466	14.759	6.988	1.955	0.772	0.318
55	916.67					17.540	8.303	2.323	0.982	0.378
60	1000.00					20.537	9.720	2.718	1.151	0.443
65	1083.33					23.746	11.237	3.142	1.332	0.513
70	1166.67					27.164	12.853	3.592	1.525	0.587
75	1250.00					30.789	14.566	4.070	1.73	0.666
80	1333.33					34.619	16.375	4.575	1.947	0.749
85	1416.67					38.651	18.281	5.106	2.039	0.855
90	1500.00					42.885	20.280	5.664	2.265	0.929
95	1583.33					47.317	22.374	6.247	2.502	1.026
100	1666.67						24.560	6.856	2.75	1.128
105	1750.00						26.839	7.491	3.009	1.233
110	1833.33						29.209	8.151	3.279	1.344
115	1916.67						31.670	8.837	3.56	1.458

HEAD LOSS IN METERS, FOR 100M LENGTH OF PIPE

APPROXIMATE FRICTIONAL HEAD LOSS IN GRANSA HEAVY TYPE COLUMN PIPES

FLOW		NOMINAL DIAMETER OF PIPE (INCHES/MM) (Table -6)								
m ³ /h	l/min.	1" 25	1¼" 32	1½" 40	2" 50	2½" 65	3" 80	4" 100	5" 125	6" 150
1	16.67	2.596	0.587	0.295	0.089	0.029	0.014			
1.5	25.00	5.277	1.193	0.599	0.181	0.060	0.028	0.009	0.002	
2	33.33	8.731	1.974	0.990	0.299	0.099	0.046	0.015	0.003	0.001
2.5	41.67	12.902	2.917	1.464	0.442	0.147	0.068	0.021	0.004	0.002
3	50.00	17.751	4.013	2.014	0.609	0.203	0.094	0.029	0.006	0.002
3.5	58.33	23.248	5.257	2.638	0.797	0.265	0.123	0.039	0.008	0.003
4	66.67	29.368	6.640	3.332	1.007	0.335	0.155	0.049	0.01	0.004
4.5	75.00	36.090	8.160	4.095	1.237	0.412	0.190	0.060	0.012	0.005
5	83.33	43.398	9.812	4.924	1.488	0.495	0.229	0.072	0.014	0.006
6	100.00	59.708	13.500	6.774	2.047	0.682	0.315	0.099	0.019	0.008
7	116.67	64.634	17.680	8.871	2.681	0.893	0.412	0.130	0.025	0.01
8	133.33		22.335	11.207	3.387	1.128	0.521	0.164	0.032	0.013
9	150.00		27.448	13.772	4.162	1.386	0.640	0.201	0.04	0.016
10	166.67		32.340	16.560	5.002	1.667	0.770	0.242	0.048	0.019
12	200.00		37.969	18.910	6.886	2.293	1.059	0.334	0.066	0.026
14	233.33		50.135	24.963	7.448	3.002	1.387	0.438	0.087	0.034
16	266.67			31.759	9.472	3.793	1.652	0.553	0.11	0.043
18	300.00			39.281	11.711	3.854	1.903	0.679	0.136	0.053
20	333.33			47.513	14.161	4.659	2.134	0.817	0.164	0.065
22	366.67			56.445	16.819	5.531	2.533	0.965	0.195	0.077
24	400.00				19.679	6.470	2.963	1.066	0.228	0.089
26	433.33				22.741	7.476	3.422	1.124	0.263	0.103
28	466.67				25.994	8.545	3.911	1.220	0.301	0.118
30	500.00				29.454	9.678	4.429	1.380	0.34	0.134
35	583.33				38.931	12.787	5.850	1.822	0.449	0.176
40	666.67				49.585	16.280	7.446	2.319	0.572	0.224
45	750.00					20.148	9.213	2.868	0.708	0.277
50	833.33					24.385	11.148	3.469	0.858	0.336
55	916.67					28.984	13.248	4.121	1.02	0.399
60	1000.00					33.940	15.510	4.823	1.195	0.468
65	1083.33					39.247	17.933	5.576	1.383	0.541
70	1166.67					44.901	20.513	6.376	1.584	0.619
75	1250.00					50.899	23.250	7.225	1.797	0.702
80	1333.33					57.236	26.140	8.121	2.022	0.79
85	1416.67						29.183	9.065	2.26	0.883
90	1500.00						32.378	10.056	2.51	0.98
95	1583.33						35.723	11.093	2.772	1.082
100	1666.67						39.216	12.176	3.047	1.189
105	1750.00						42.857	13.304	3.333	1.301
110	1833.33						46.644	14.477	3.632	1.417
115	1916.67						50.577	15.696	3.942	1.538

HEAD LOSS IN METERS, FOR 100M LENGTH OF PIPE

SELECTION OF PIPES

Permissible Hydrostatic pressure of Gransa uPVC column pipes (Table - 8)													
(10 m = 1 kg/cm ²)													
Variant / Nominal Diameter	1 inch (25 mm)		1¼ inch (32 mm)		1½ inch (40 mm)		2 inch (50 mm)		2½ inch (65 mm)	3 inch (80 mm)	4 inch (100 mm)	5 inch (140 mm)	6 inch (165 mm)
Pipe Type	Bell Mouth	Coupler	Bell Mouth	Coupler	Bell Mouth	Coupler	Bell Mouth	Coupler	Coupler	Coupler	Coupler	Coupler	Coupler
Epsy	12.5	12.5	12.5	12.5	12.5	12.5	7	7	-	-	-	-	-
Elite	15	15	15	15	15	15	9	9	-	-	-	-	-
Medium	21	21	21	21	21	21	13	13	10	11	10	-	-
Standard	30	30	26	26	26	26	20	20	16	17	15	16	17
Heavy	-	-	-	35	-	35	-	27	26	26	26	26	26
Super Heavy	-	-	-	40	-	40	-	35	35	35	35	35	35

ACCESSORIES



Bottom adaptor: Available in cast iron & stainless steel, this adaptor is used to connect the first piece of uPVC column pipe to the submersible pump. Since the threads of the pump and the pipe vary an adaptor is used.



Top adaptor: Available in Mild Steel & S.S this adaptor is used to connect the last piece of uPVC column pipe to the outlet / discharge bend. Since, the threads of the pipe and the outlet connective vary, an adaptor is used.

Pump Guard: In theory in the entire length of the column, the first joint of column pipe with the submersible pump is the weakest one. Gransa uPVC column pipes are produced considering this factor. Even though, as a precautionary care, a pump guard is recommended as an accessory.

A Pump guard set consists of a short length uPVC column pipes, along with two steel rods, two flanges, nuts and cotter pins.

Expander / Reducer: Depending on the customer request, to use a column pipe varying from the size of the outlet of the pump, an expander / reduce will be supplies.



Lowering Jig: It is an accessory used to lower the pipe in the borewell. The Lowering Jig is with square threads to fit into the pipe and the other end is provided with a hook, which can be tied up to the chain of the tripod stand.



Belt Wrench: Gransa suggests to use only belt wrenches to tighten the column pipes. A metal wrench will cause damage while tightening.



Clamps: These clamps are used to support the column pipe at the outlet of the borewell.

INSTALLATION PROCEDURE:

- First connect the bottom adaptor firmly to the pump discharge housing using a pipe wrench and first pipe can be connected along with pump guard.
- Before connecting clean both the ends of the pipes with clean water and check rubber seal ring for any damage.
- The pipe can be tightened by hand itself but, while tightening water has to be poured on pipe threads for lubrication. Anyhow for better grip belt wrench can be used to tighten / hold the pipes. Never use metal wrench on pipes.
- Tighten the pipes until the rubber seal ring in the pipe end completely enters in to the coupling.
- Submersible pump cable need to be tied in regular intervals along with the column pipes, for securing the cable from getting damaged.
- Once the top column pipe reaches the ground level, connect the top adaptor.
- Finally from the ground level, regular plumbing accessories can be used to transfer water to required delivery point.



NOTE : Separate earth conductor should be used for earthing the submersible pump, as these pipes are insulators.

Precautions:

Installation Conditions:

Full casing of bore well is recommended for long life of bore and pump. The casing pipes protect the bore from collapsing due to loose boulders, stones, soil and silt. It also reduces the chance of accident due to protruding stones and boulders at the time of removing the pump and pipe.

Removal Conditions :

At the time of removal of pumps from bores, it is advisable to ensure that there is no accumulation of boulders, stones and silt. During removal in case pump gets stuck due to such accumulation, proper flushing of the borehole should be done before applying the pulling load on the pipes.

Avoid Dry Run of Pump:

Dry run of submersible pump generates hot air which can damage/ deform the first Column Pipe connected with the pump. To avoid this:

- Use timer switch to turn on or off the pump automatically as per the pre-set time, determined after assessing the bore yield.
- Use of 3 metres S.S. Pipe between pump and Gransa uPVC Column Pipe will help dissipate the heat, preventing any damage or deformation.

Prevention of Water Hammer:

At the time of pump stoppage, water recedes/falls at tremendous speed from a height. Especially in deep bore wells of about 500 ft & above, this creates enormous pressure and load on the pump which leads to damage of pump and pipe. For such deep bore wells, it is recommended to make a 3mm hole in the pump NRV to protect the pump and pipe from water hammering.

CASING & SCREEN PIPE :

The important component of any water well are its casing & screening pipes. Properly selected and installed, they will ensure that the water well / borehole remains intact and ensures that it continues to remain a perennial source of clean water.

Until a few years ago, metal pipes and screens were the only option for these applications. The inherent disadvantages were corrosion of metal casing pipes, deterioration of screens and formation of bacteria, resulted in the abandonment of wells, and sometimes even, contamination of the water source.

We at GRANSA manufacture uPVC casing and screen pipes as per IS 12818:2010 standards. They are available in different sizes ranging from 40 mm to 300 mm. These pipes can be used in any of the irrigation, domestic, mining and industrial boreholes, helping to keep out the gravel pack and foreign particles, providing clean and clear water.

Well Casing pipes are necessary to exclude the shallow groundwater, protect the pump and support the unstable upper layers of loose soil and rock from collapsing into the borehole.

Deeper down, the groundwater flow system may be through unstable sands and gravels, or highly fractured and weathered bedrock aquifers. In both the cases, it is important to stabilise the aquifer strata, and at the same time, allow the groundwater to flow easily into the borehole. A Well Screen pipe is installed to achieve this purpose.



Advantages of GRANSA uPVC casing & screen pipes:

- Corrosion resistant: Being of plastic material, these pipes do not corrode.
- Light weight: These pipes are light in weight and are easy to transport. It is a big advantage in the areas where the road conditions are not good.
- Easy to handle and install: High quality threaded joints ensure easy assembly and installation at the site.
- Non-Conductive: These pipes are non reactive and thus no electro-chemical reaction takes place with water, thus preventing encrustation in the pipes.
- Economical: Compared to other alternatives, these pipes are economical to the end user.
- Ensuring water quality: These pipes do not impart any colour, taste or odour to the water
- Stiffness and strength: these pipes are embedded with excellent mechanical properties, thus are capable of withstanding the hydraulic pressure, the pipes are subjected during the construction of the well.
- Convenient and reliable: Provides easy and stronger joints.
- Gransa uPVC casing pipes are provided with Trapezoidal threads which provide easy and strong joints.
- Gransa uPVC screen pipes facilitate optimum performance & safety by keeping the gravel pack & other foreign substances out of the well.
- Gransa uPVC screen pipes has horizontal slots which enables laminar flow into the well ensuring higher permeability and reducing well entrance losses, thus saving pumping energy and offer higher yields.

Kindly note, it is recommended that the diameter of the casing should be atleast 2" (50 mm) greater than the outer diameter of the pump. Also, kindly ensure that the installed length of the pump chamber is sufficient to accommodate the pump even when the pumping water level is at its lowest.

CASING PIPE DIMENSION DETAILS:

Table 9 : CS Pipes for shallow wells upto 80m depth								
Nominal Size - DN (mm)	Pipe size in inches	Outer Diameter		O.D at any point		Mean OD over Connection	Wall Thickness (mm)	
		Min.	Max.	Min.	Max.	Max.	Min.	Max.
100	4"	113	113.3	112.9	113.4	119	3.9	4.6
115	4.5"	125.00	125.30	124.90	125.40	130	4.2	4.8
125	5"	140.00	140.40	139.90	140.50	148	5.20	6.00
150	6"	165.00	165.40	164.60	165.60	174.00	5.70	6.50
180	6.5"	180.00	180.50	179.80	180.60	190	7.00	7.80
175	7"	200.00	200.50	199.60	200.60	211.00	7.00	7.80
200	8"	225.00	225.50	224.50	225.80	238.00	7.60	8.80
250	10"	280.00	280.50	279.40	280.80	292.00	9.60	11.00
300	12"	330.00	330.60	329.30	331.00	346.00	11.20	13.30

Table 10 : CM Pipes for medium wells upto 250m depth								
Nominal Size - DN (mm)	Pipe size in inches	Outer Diameter		O.D at any point		Mean OD over Connection	Wall Thickness (mm)	
		Min.	Max.	Min.	Max.	Max.	Min.	Max.
35	1.25"	42.00	42.20	41.90	42.30	46.00	3.50	4.00
40	1.5"	48.00	48.20	47.90	48.30	52.00	3.50	4.00
50	2"	60.00	60.20	59.90	60.30	65.00	4.00	4.60
80	3"	88.00	88.30	87.90	88.40	94.00	4.00	4.60
100	4"	113.00	113.30	112.90	113.40	120.00	5.00	5.70
115	4.5"	125.00	125.30	124.90	125.40	132.00	5.00	5.70
125	5"	140.00	140.40	139.90	140.50	150.00	6.50	7.30
150	6"	165.00	165.40	164.60	165.60	178.00	7.50	8.50
180	6.5"	180.00	180.50	179.80	180.60	193	8.00	8.80
175	7"	200.00	200.50	199.60	200.60	215.00	8.80	9.80
200	8"	225.00	225.50	224.50	225.80	243.00	10.00	11.20
250	10"	280.00	280.50	279.40	280.80	298.00	12.50	14.00
300	12"	330.00	330.60	329.30	331.00	352.00	14.50	16.20



Table 11 : CD Pipes for deep wells upto 450 mtrs depth

Nominal Size - DN (mm)	Pipe size in inches	Outer Diameter		O.D at any point		Mean OD over Connection	Wall Thickness (mm)	
		Min.	Max.	Min.	Max.	Max.	Min.	Max.
100	4"	113.00	113.30	112.80	113.40	125.00	7.00	7.90
115	4.5"	125.00	125.30	124.90	125.40	137.00	7.50	8.50
125	5"	140.00	140.40	139.70	140.50	152.00	8.00	9.00
150	6"	165.00	165.40	164.60	165.60	180.00	9.50	10.70
180	6.5"	180.00	180.50	179.80	180.60	190.00	10.20	11.40
175	7"	200.00	200.50	199.60	200.60	217.00	11.80	13.60
200	8"	225.00	225.50	224.50	225.80	247.00	13.00	14.80
250	10"	280	280.5	279.4	280.8	304	16	17.6
300	12"	330	330.6	329.3	331	359	19	21

SCREEN PIPE DIMENSION DETAILS:

Table 12 : Ribbed Medium Well Screen (RMS) Pipes

Nominal Size - DN (mm)	Pipe size in inches	Outer Diameter		O.D at any point		Mean OD over Connection	Wall Thickness (mm)	
		Min.	Max.	Min.	Max.		Min.	Max.
35	1.25"	46	46.2	45.90	46.30	50.00	3.50	4.00
40	1.5"	52	52.2	51.90	52.30	56.00	3.50	4.00
50	2"	64	64.2	63.90	64.30	69.00	4.00	4.60
80	3"	92	92.3	91.80	92.40	98.00	4.00	4.60
100	4"	117.00	117.30	116.80	117.40	124.00	5.00	5.70
115	4.5"	129.00	129.30	128.80	129.40	136.00	5.00	5.70
125	5"	144.00	144.30	143.70	144.50	154.00	6.50	7.30
150	6"	169.00	169.40	168.60	169.60	182.00	7.50	8.50
175	7"	204.00	204.50	203.60	204.60	219.00	8.80	9.80
200	8"	229.00	229.50	228.50	229.80	247.00	10.00	11.20
250	10"	284.00	284.50	283.40	284.80	302.00	12.50	14.00
300	12"	334.00	334.60	333.30	335.00	356.00	14.50	16.20

Table 13 : Ribbed Deep Well Screen (RDS) Pipes

Nominal Size - DN (mm)	Pipe size in inches	Outer Diameter		O.D at any point		Mean OD over Connection	Wall Thickness (mm)	
		Min.	Max.	Min.	Max.		Min.	Max.
100	4"	117.00	117.30	116.80	117.40	129.00	7.00	7.90
115	4.5"	129.00	129.30	128.80	129.40	141.00	7.50	8.50
125	5"	144.00	144.40	143.70	144.50	156.00	8.00	9.00
150	6"	169.00	169.40	168.60	169.60	184.00	9.50	10.70
175	7"	204.00	204.50	203.60	204.60	221.00	11.80	13.60
200	8"	229.00	229.50	228.50	229.80	251.00	13.00	14.80
250	10"	284.00	284.50	283.40	284.80	309	16	17.6
300	12"	334.00	334.60	333.30	335.00	363	19	21

Table 14 : Plain Medium Well Screen (PMS) Pipes

Nominal Size - DN (mm)	Pipe size in inches	Outer Diameter		O.D at any point		Mean OD over Connection	Wall Thickness (mm)	
		Min.	Max.	Min.	Max.		Min.	Max.
200	8"	225.00	225.50	224.50	225.80	243.00	10.00	11.20
250	10"	280.00	280.50	279.40	280.80	298.00	12.50	14.00
300	12"	330.00	330.60	329.30	331.00	352.00	14.50	16.20

Table 15 : Plain Deep Well Screen (PDS) Pipes

Nominal Size - DN (mm)	Pipe size in inches	Outer Diameter		O.D at any point		Mean OD over Connection	Wall Thickness (mm)	
		Min.	Max.	Min.	Max.		Min.	Max.
200	8"	225.00	225.50	224.50	225.80	247.00	13.00	14.80
250	10"	280.00	280.50	279.40	280.80	304	16	17.6
300	12"	330.00	330.60	329.30	331.00	359	19	21

INSTALLATION PROCEDURE

- Arrange the pipe assembly on the ground
- Fix the centering guides on the pipes once in every 15 meters (minimum), just below the neck of the socket, with the open end of the centering guides facing upwards while lowering.
- Always use a plain casing pipe (sand trap) for the first pipe to be lowered, with a conical end cap (Bullnose) blanking the spigot end of the pipe. Fill this pipe with water or drilling fluid before lowering into the well.
- Wash the reamed borehole thoroughly with fresh drilling fluid (Bentonite Solution) for 40-45 minutes from the bottom, keeping the specific gravity of the drilling fluid to below 1.4. This will prevent heavy sedimentation at the bottom of the borehole and also easy lowering of the assembly.
- To obtain better results, ensure that the reamed borehole is at least 15 to 20cms more than the outside diameter of the casing pipe.
- The sand trap is the lowest pipe in a tubewell and is the first to be selected. Fit this pipe with an end plug (cap) and centering guide.
- Lower the sand trap into the borehole and hold with a split clamp with the socketed end facing upward.
- The next pipe, which is either a screen pipe or a plain pipe (depending on lithology of well) is fitted to the sand trap by screwing them together.
- Jointing of pipes can be done either by belt wrench or with manila rope. Never use a chain wrench. Clean the threads to remove mud or burrs using wire brush. Soap solution may be used to lubricate the joints. Avoid grease or waste oil.
- Fit the socketed end of the next pipe (which can be a screen/plain casing) with the fitting cap.
- Connect the lifting cap securely with the wire rope of the drilling frame.
- Use winch of drilling machine to lift the threaded pipe string.
- This pipe string is jointed to the pipe already lowered into the borehole.
- Centre the assembled pipe string and permit it to descend into the borehole by releasing the split clamp, Fill the pipe with water or mud solution to equalize pressure.
- Repeat the operation till all the casings and screens are lowered according to the lithology of the well. The time needed to make each joint is less than 5 minutes.
- Lowering time can be reduced by jointing the casings and screens on the ground to make additional lengths. Do this correctly as per lithology of well to avoid wrong placement of screens in the bore well.
- Do not set the lowered pipe assembly at the bottom of the borehole. Ensure at least 10 feet of free bore below the sand trap. This helps the lowered casing and screen pipes to remain hanging and achieve a vertical installation.
- Centering guides should always be fixed at a minimum interval of 1.5 meters to ensure uniform gravel packing around the casing and screen pipes.
- Take extra care at the time of bore well flushing. Use a rubber coated metal pipe joined at the end of the compressor air hose. It is advisable to maintain compressor air pressure below 12 bars. Generation of excess pressure inside the casing pipe may lead to pipe breakage.

Accessories :

End cap : These are used for sealing the bottom and top of the casing and screen pipe and to avoid the entrance of any foreign particles into the borehole.

Centering Guides : These are used in casing and screen pipes to ensure proper positioning of the casing in the borehole and uniform gravel packing around the casing and screen pipes.

Vision & Mission

To lead from the front and set the standard in providing fluid management solutions across a wide spectrum of industries across the globe. To make the world a better place by embracing viable, sustainable technologies and processes and enlightened business practices. Our experience, expertise, the quality of our people and, of course, our strong customer orientation would be factors that would leverage our efforts to achieve our ends and fulfil our avowed commitment to all our stakeholders.



Saravanampatti, Coimbatore,
India - 641035.
Email: sales@gransaglobal.com www.gransaglobal.com